



90 Sawyer Parkway Mansfield, Ohio 44903
Phone: 419-759-3644
Submit to: mksales@mkmetalproducts.com
www.mkmetalproducts.com

ZTR CONVEYOR RFQ INFORMATION

Company: _____ Date: _____
Contact Name: _____ Phone No. _____ Contact Email: _____
Project Name / Reference _____ Project Installation Location: _____
Quote Due _____ Desired Delivery _____

Product Specs:

Max:

- Width (inches) _____ Length (inches) _____
- Height (inches) _____ Weight (lbs) _____

Min:

- Width (inches) _____ Length (inches) _____
- Height (inches) _____ Weight (lbs) _____

Description: _____

Max. Qty: _____ Total Live Load _____

Temperature

- Environment: _____
- Product: _____

Is Product Orientation Critical?

- ☐ NO
☐ YES _____

Conveyor Type:

- ☐ 45° Curve
☐ 90° Curve
☐ 180° Curve

Conveyor Construction:

- ☐ Welded Steel
 ☐ Painted
 ☐ Epoxy Painted
 ☐ None
☐ Welded Stainless Steel
 ☐ Sand Blasted
 ☐ Wash Down SS
☐ Bolt-Together Galvanized


Support Type:

- ☐ Fixed Legs
☐ Adjustable Legs
☐ Ceiling Supports
☐ Portable
☐ Other
☐ None

Dimensional Information:


Outside Radius (OR): _____

Inside Radius (IR): _____

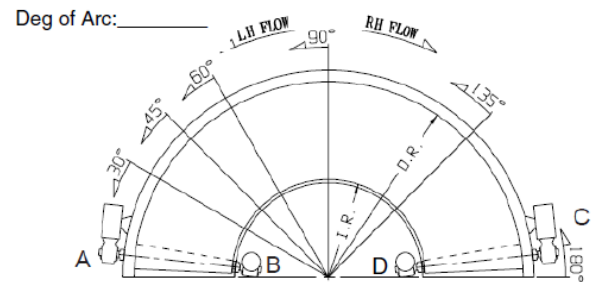

Drive Position / Flow:

- ☐ Left Hand (CCW) - ☐ A or ☐ B
☐ Right Hand (CW) - ☐ C or ☐ D
☐ Reversing - How Often: _____



Belt:

- ☐ Intralox 2200 (3/4" thick) [2.2x BW]
☐ Intralox 2300 (5/8" thick) [2.3x BW]
☐ Intralox 2400 (1/2" thick)*[2.2xBW]
 ☐ Tight Turning Radius
 ☐ Radius Flush Grid
 ☐ Radius Flush Grid with Edge Bearing

Between Frame Width (BF): _____

Belt Width (BW): _____

Drive Type:

- ☐ Shaft Mount
☐ Direct Coupling
☐ Over Top _____" Clearance
☐ Motorized Drive Pulley
☐ Under Hung
☐ Side Mount
☐ Other



90 Sawyer Parkway Mansfield, Ohio 44903
Phone: 419-759-3644
Submit to: mksales@mkmetalproducts.com
www.mkmetalproducts.com

ZTR CONVEYOR RFQ INFORMATION (Cont.)

Drive Location:

- ☐ Left Side
- ☐ Right Side
- ☐ Discharge End
- ☐ Center
- ☐ Right Hand Drive
- ☐ One Direction Product Flow
- ☐ Bi-Direction Product Flow
- ☐ Other

Drive Brand:

- ☐ Nord
- ☐ SEW
- ☐ Other _____
- ☐ No Preference

Requested Horsepower: _____

Speed: _____ FPM

- ☐ Fixed
- ☐ Variable (10:1 Ratio)

Controls:

- ☐ AC Speed Controller
- ☐ DC Speed Controller
- ☐ Mechanical Variable Speed Adjustment
- ☐ None

Plant Voltage:

- ☐ 110V Single Phase
- ☐ 220V Single Phase
- ☐ 220V Three Phase
- ☐ 460V Three Phase
- ☐ 208V Three Phase
- ☐ 575V Three Phase

Electrical Requirements:

- ☐ No Electrical / wiring needed
- ☐ Programming & PLC runoff at MK
- ☐ Programming & Electrical on-site

Add-on Requests:

- ☐ Photo-Eyes
- ☐ Casters _____ DIA
 - ☐ Swivel
 - ☐ Rigid
 - ☐ Floor Lock
 - ☐ Swivel Lock
 - ☐ Wheel Brake
 - ☐ No lock

Add-on Requests (continued):

- ☐ Product Side Guides
 - ☐ Roller Type
 - ☐ Rail Type
 - ☐ UHMW
- ☐ Guards
- ☐ Belly-Pan Guarding
- ☐ Emergency Stop
 - ☐ Mushroom - One Side
 - ☐ Mushroom - Both Sides
 - ☐ Cable Pull - One Side
 - ☐ Cable Pull - Both Sides
- ☐ Self-Cleaning

Optional Equipment:

- ☐ Pneumatics
- ☐ hydraulics
- ☐ Cylinder
- ☐ Chain Transfer
- ☐ Door Stop
- ☐ Roller Transfer
- ☐ Flip-up stop
- ☐ Pusher
- ☐ Pin Stop
- ☐ OSHA flr lockout
- ☐ Transition Accessories:
 - ☐ Gravity Roller
 - ☐ Plate

Is this mating up to MK Metal Products Equipment?

- ☐ Yes
- ☐ No

Additional Information:
