



90 Sawyer Parkway Mansfield, Ohio 44903
Phone: 419-759-3644
Submit to: mksales@mkmetalproducts.com
www.mkmetalproducts.com

BELT CONVEYOR RFQ INFORMATION

Company: _____ Date: _____
Contact Name: _____ Phone No. _____ Contact Email: _____
Project Name / Reference _____ Project Installation Location: _____
Quote Due _____ Desired Delivery _____

Product Specs:

Max:

- Width (inches) _____ Length (inches) _____
- Height (inches) _____ Weight (lbs) _____

Min:

- Width (inches) _____ Length (inches) _____
- Height (inches) _____ Weight (lbs) _____

Description: _____

Max. Qty: _____ Total Live Load _____

Temperature

- Environment: _____
- Product: _____

Conveyor Type:

- ☐ Slider Bed
- ☐ Roller Bed
 - ☐ 1.9 x16 GA.
 - ☐ 1.9 x145 W.
 - ☐ 2 1/2 x 11 GA.
 - ☐ Other _____

Roller C/C: _____

- ☐ set high
- ☐ set low

- ☐ V-Guided
 - ☐ Cleated Height: _____ C/C: _____
- ☐ Trough
- ☐ Other _____

Conveyor Construction:

- ☐ Welded Steel
 - ☐ Painted
 - ☐ Epoxy Painted
 - ☐ None
- ☐ Welded Stainless Steel
 - ☐ Sand Blasted
 - ☐ Wash Down SS
- ☐ Bolt-Together Galvanized

Support Type:

- ☐ Fixed Legs
- ☐ Adjustable Legs
- ☐ Ceiling Supports
- ☐ Portable
- ☐ Other _____
- ☐ None

Conveyor Orientation:

- ☐ Horizontal
- ☐ Incline
- ☐ Decline

A = _____' - _____" Horiz. OAL

B = _____' - _____" TOB


C = _____' - _____" TOB

D = _____' - _____" Elevation Change

E = _____' - _____" Nose-Over

F = _____' - _____" Power Infeed (Slaved)

G = _____ Deg. Approx. (Ref.)

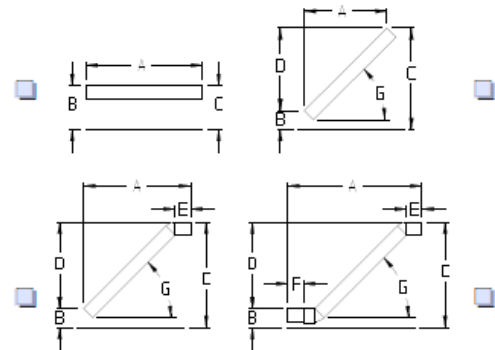

Belt:

- ☐ Plastic
- ☐ Intralox Flat Top
- ☐ Intralox Roller Top
- ☐ Intralox Friction Top
- ☐ Raised Friction Top
- ☐ Open Grid
- ☐ Fabric
- ☐ V-guide
- ☐ Chain
- ☐ Other _____

Between Frame Width (BF): _____

Belt Width (BW): _____

Drive Type:

- ☐ Chain & Sprocket
- ☐ Shaft Mount
- ☐ Direct Coupling
- ☐ Over Top _____" Clearance
- ☐ Motorized Drive Pulley
- ☐ Under Hung
- ☐ Side Mount
- ☐ Other _____



90 Sawyer Parkway Mansfield, Ohio 44903

Phone: 419-759-3644

Submit to: mksales@mkmetalproducts.com

www.mkmetalproducts.com

BELT CONVEYOR RFQ INFORMATION (Cont.)

Drive Location:

- ☐ Left Side
- ☐ Right Side
- ☐ Discharge End
- ☐ Center
- ☐ Right Hand Drive
- ☐ One Direction Product Flow
- ☐ Bi-Direction Product Flow
- ☐ Other

Drive Brand:

- ☐ Nord
- ☐ SEW
- ☐ Other _____
- ☐ No Preference

Requested Horsepower: _____

Speed: _____ FPM

- ☐ Fixed
- ☐ Variable (10:1 Ratio)

Controls:

- ☐ AC Speed Controller
- ☐ DC Speed Controller
- ☐ Mechanical Variable Speed Adjustment
- ☐ None

Plant Voltage:

- ☐ 110V Single Phase
- ☐ 220V Single Phase
- ☐ 220V Three Phase
- ☐ 460V Three Phase
- ☐ 208V Three Phase
- ☐ 575V Three Phase

Electrical Requirements:

- ☐ No Electrical / wiring needed
- ☐ Programming & PLC runoff at MK
- ☐ Programming & Electrical on-site

Add-on Requests:

- ☐ Photo-Eyes
- ☐ Casters _____ DIA
 - ☐ Swivel
 - ☐ Rigid
 - ☐ Floor Lock
 - ☐ Swivel Lock
 - ☐ Wheel Brake
 - ☐ No lock
- ☐ Product Side Guides
 - ☐ Roller Type
 - ☐ Rail Type
 - ☐ UHMW
- ☐ Guards

Add-on Requests (Continued):

- ☐ Belly-Pan Guarding
- ☐ Emergency Stop
 - ☐ Mushroom - One Side
 - ☐ Mushroom - Both Sides
 - ☐ Cable Pull - One Side
 - ☐ Cable Pull - Both Sides

Optional Equipment:

- ☐ Pneumatics
- ☐ hydraulics
- ☐ Cylinder
- ☐ Chain Transfer
- ☐ Door Stop
- ☐ Roller Transfer
- ☐ Flip-up stop
- ☐ Pusher
- ☐ Pin Stop
- ☐ OSHA flr lockout

Additional Information:
